


Dimensioni Motori Elettrici Stiavelli



Dimensioni ingombri e montaggio forma IMB3, valori espressi in mm.

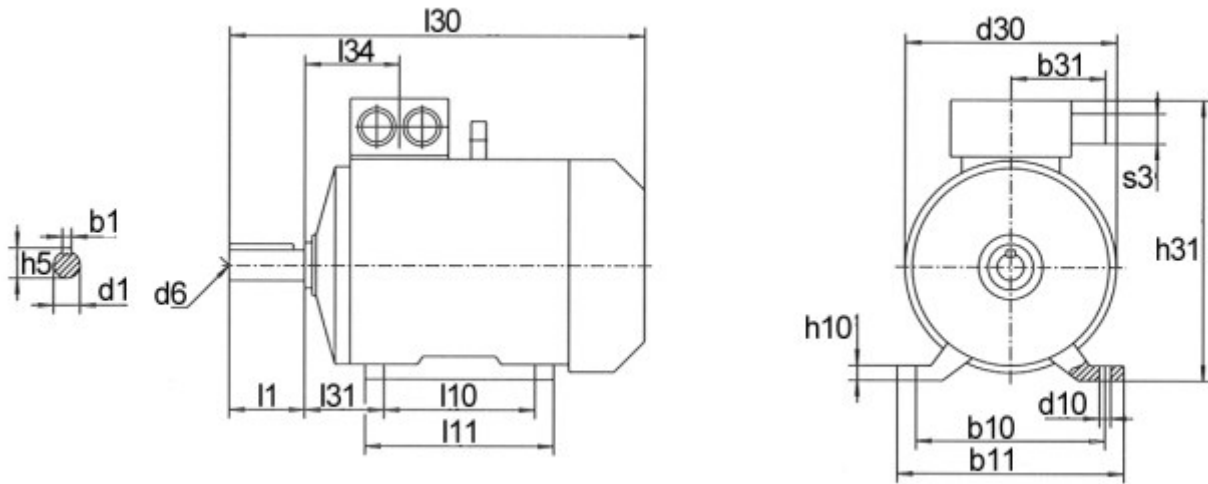

Tipo	Poli	Dimensioni Ingombri				Dimensioni Montaggio												
		I30	h31	d30	I1	I10	I11	I31	d1	d10	b1	b2	b10	b11	b31	h	h5	h10
RA71	2,4	236	188	150	30	90	112	45	14	7	5	4	112	138	75	71	16	7
RA80	A2,4,B4	271	197	150	40	100	130	50	19	10	6	4	125	155	75	80	21.5	8
RA80	B2	291	197	150	40	100	130	50	19	10	6	4	125	155	75	80	21.5	8
RA90S	2,4,6	300	217	175	50	100	130	56	24	10	8	6	140	174	75	90	27.0	10
RA90L	2,4,6	320	217	175	50	125	155	56	24	10	8	6	140	174	75	90	27.0	10
RA100L	2,A4,6	355	227	175	60	140	176	63	28	12	8	6	160	196	75	100	31.0	12
RA100L	B4	378	227	175	60	140	176	63	28	12	8	6	160	196	75	100	31.0	12
RA112	2,4,6,8	435	290	255	60	140	178	70	28	12	8	8	190	230	83	112	31.0	11
RA132S	A2,4,6	475	310	255	80	140	184	89	38	12	10	8	216	260	83	132	41.0	13
RA132S	B2	505	310	255	80	140	184	89	38	12	10	8	216	260	83	132	41.0	13
RA132M	4,6,8	505	310	255	80	178	222	89	38	12	10	8	216	260	83	132	41.0	13
RA160M	2,4,6,8	605	405	350	110	210	253	108	42	15	12	12	254	300	160	160	45.0	20
RA160L	2,4,6,8	645	405	350	110	254	297	108	42	15	12	12	254	300	160	160	45.0	20
RA180M	2,4	645	425	350	110	241	290	121	48	15	14	12	279	330	160	180	51.5	23
RA180L	4,6,8	645	425	350	110	279	328	121	48	15	14	12	279	330	160	180	51.5	23
RA200LA	2	720	475	380	110	305	375	133	55	19	16	16	318	390	205	200	59.0	28
RA200LB	2	805	475	380	110	305	375	133	55	19	16	16	318	390	205	200	59.0	28
RA200L	4,6,8	720	475	380	110	305	375	133	55	19	16	16	318	390	205	200	59.0	28
RA225M	2	805	500	380	110	311	380	149	55	19	16	16	356	420	205	225	59	28
RA225S	4,8	750	500	380	140	286	355	149	60	19	18	16	356	420	205	225	64	28
RA225M	4,6	835	500	380	140	311	380	149	60	19	18	16	356	420	205	225	64	28
RA225M	4,6,8	750	500	380	140	311	380	149	60	19	18	16	356	420	205	225	64	28
RA250M	2	870	540	415	140	349	425	168	60	24	18	16	406	482	205	250	64	32
RA250M	4,6,8	870	540	415	140	349	425	168	65	24	18	18	406	482	205	250	69	32
RA280S	2	930	625	495	140	368	440	190	65	24	18	16	457	535	225	280	69	32
RA280S	4,6,8	930	625	495	140	368	440	190	75	24	20	18	457	535	225	280	79.5	32
RA280M	2	930	625	495	140	419	495	190	65	24	18	16	457	535	225	280	69	32

RA280M	4,6	930	625	495	140	419	495	190	75	24	20	18	457	535	225	280	79.5	32
RA280M	8	990	625	495	140	419	495	190	75	24	20	18	457	535	225	280	79.5	32
RA315S	2	1050	660	495	140	406	535	216	65	28	18	18	508	640	225	315	69	45
RA315S	4	1080	660	495	170	406	535	216	80	28	22	20	508	640	225	315	85	45
RA315M	2	1050	660	495	140	457	590	216	65	28	18	18	508	640	225	315	69	45

I valori indicati possono essere soggetti a variazione senza preavviso a discrezione del costruttore, sono quindi da ritenersi indicativi.