


Dimensioni Motori Stiavelli



Dimensioni ingombri e montaggio forma IMB5, valori espressi in mm. Le dimensioni sono in accordo agli standard CENELEC e DIN.

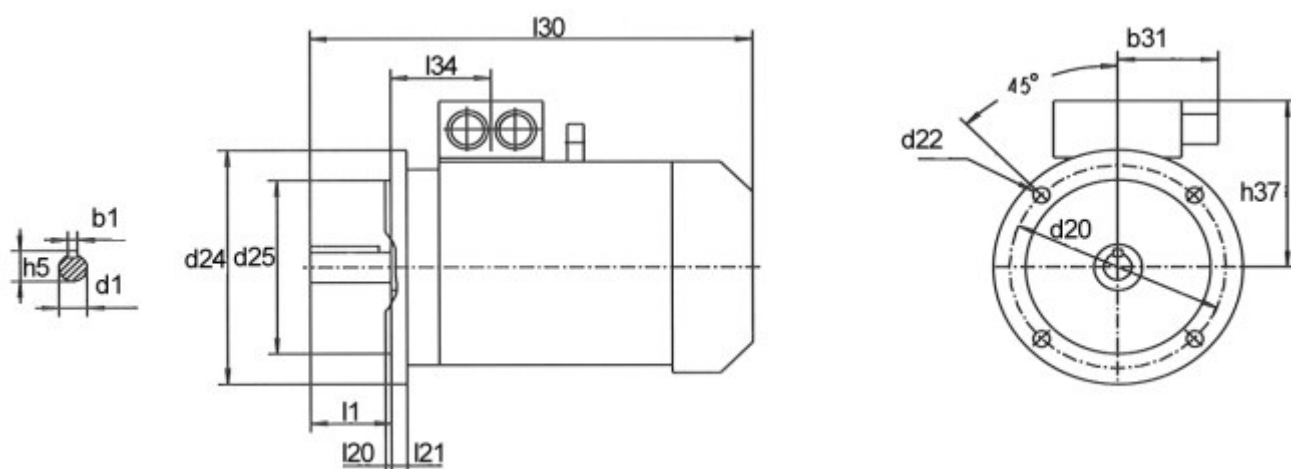

Tipo	Poli	Dimensioni Ingombri					Dimensioni Montaggio							
		h37	d24	l1	l20	l21	d1	d20	d22	d25	b1	b2	b31	h 5
RA71	2,4	117	160	30	3.5	9	14	130	9	110	5	4	75	16
RA80	A2,4,B4	117	200	40	3.5	10	19	165	11	130	6	4	75	21.5
RA80	B2	117	200	40	3.5	10	19	165	11	130	6	4	75	21.5
RA90S	2,4,6	127	200	50	3.5	10	24	165	11	130	8	6	75	27
RA90L	2,4,6	127	200	50	3.5	10	24	165	11	130	8	6	75	27
RA100L	2,A4,6	127	250	60	4.0	11	28	215	14	180	8	6	75	31
RA100L	B4	125	250	60	4.0	11	28	215	14	180	8	6	75	31
RA112M	2,4,6	178	250	60	4.0	12	28	215	14	180	8	8	83	31
RA132S	A2,4,6	178	300	80	4.0	12	38	265	14	230	10	8	83	41
RA132S	B2	178	300	80	4.0	12	38	265	14	230	10	8	83	41
RA132M	4,6	178	300	80	4.0	12	38	265	14	230	10	8	83	41
RA160M	2,4,6,8	245	350	110	5.0	15	42	300	19	250	12	12	160	45
RA160L	2,4,6,8	245	350	110	5.0	15	42	300	19	250	12	12	160	45
RA180M	2,4	245	350	110	5.0	15	48	300	19	250	14	12	160	51.5
RA180L	4,6,8	245	350	110	5.0	15	48	300	19	250	14	12	160	51.5
RA200LA	2	275	400	110	5.0	15	55	350	19	300	16	16	205	59
RA200LB	2	275	400	110	5.0	15	55	350	19	300	16	16	205	59
RA200L	4,6,8	275	400	110	5.0	15	55	350	19	300	16	16	205	59
RA225M	2	275	450	110	5.0	16	55	400	19	350	16	16	205	59
RA225S	4,8	275	450	140	5.0	16	60	400	19	350	18	16	205	64
RA225M	4,6	275	450	140	5.0	16	60	400	19	350	18	16	205	64
RA225M	8	275	450	140	5.0	16	60	400	19	350	18	16	205	64
RA250M	2	290	550	140	5.0	18	60	500	19	450	18	16	205	64
RA250M	4,6,8	290	550	140	5.0	18	65	500	19	450	18	18	205	69
RA280S	2	345	550	140	5.0	18	65	500	19	450	18	16	225	69

RA280S	4,6,8	345	550	140	5.0	18	75	500	19	450	20	18	225	79.5
RA280M	2	345	550	140	5.0	18	65	500	19	450	18	16	225	69
RA280M	4,6,8	345	550	140	5.0	18	75	500	19	450	20	18	225	79.5
RA315S	2	345	660	140	6.0	22	65	600	24	550	18	18	225	69
RA315S	4	345	660	170	6.0	22	80	600	24	550	22	20	225	85
RA315M	2	345	660	140	6.0	22	65	600	24	550	18	18	225	69

I valori indicati possono essere soggetti a variazione senza preavviso a discrezione del costruttore, sono quindi da ritenersi indicativi.